



KM 2 -18 X

LIGHTWEIGHT INFRARED ASPHALT HEATER (3'6" x 6'6")



PAVERS SOLUTION

The lightweight KM2-18X is easily moved to service areas previously inaccessible. The fully self contained infrared unit is a workhorse & will provide many hours of repairs using two 14kg gas cylinders. This is the perfect machine for new pavement fixes and utility cut repairs

The KM2-18X offers the operator an option to use either a single $3'-6" \times 3'-3"$ zone or dual $3'-6" \times 6-6"$ zones totalling 22.75 ft² of infrared heat. This unit works well for thermoplastic installation as well as the following applications:

Potholes • Sunken utility joints • Pavement cracks
Reinstatements around manhole covers • Reworking rough pavement areas
Street Print® applications




FEATURES

VALUE ADDED

- Solar Panel
- 12v Blower
- 12v deep cycle gel battery
- (2) 14kg propane cylinders

SAFETY

- Automatic Pilot Ignition
- Zone Selection Controls
- Emergency Stop button

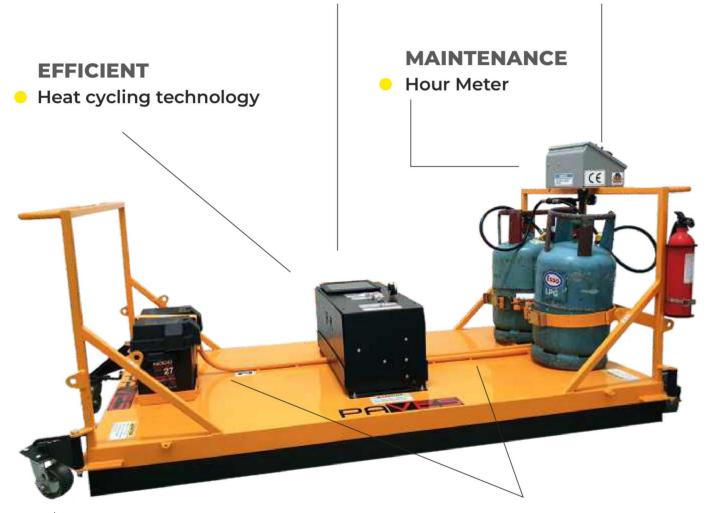

MANOEUVRABLE

Independently Controlled Casters

VERSATILE

(2) Individually Controlled
 3'5 x 6'55" heating zones

SPECIFICATIONS

Overall Dimensions (L x W x H) Transit Dimensions (L x W x H)	6'6" x 3'6" x 3.5' 6'6" x 4'10" x 44", Includes Casters
Heating Element Heating Zones Heating Area Zone Controls	1" Ceramic Refractory Blanket (2) 3.3" x 3.6" (W) 3'6" X (L) 6'6" Manual ON/OFF valves w/ switched Electronic Cycling
Fuel Fuel Consumption	Propane : (2) 14 kg Cylinders Cycled Heating - 5.44 kg. per hour
Blower	12V DC Powered
Battery	12V Deep Cycle Marine Gel
Overall Weight	185 kg
BTU Output	300,000 BTU
Pilot	Automatic, Electric Ignition
Castors	4 Pivoting & Swivel, 4" Steel

^{*}Specifications subject to change without notice















Tel:+65 6570 8091

Fax: +65 6570 8092

sales@paves.com.sg www.paves.com.sg